

Vertex N

BIFACIAL DUAL GLASS MODULE

PRODUCT: TSM-XXXNEG20C.20

PRODUCT RANGE: 600-620W

620W


MAXIMUM POWER OUTPUT

0~+5W

BINNING TOLERANCE

21.9%

MAXIMUM EFFICIENCY

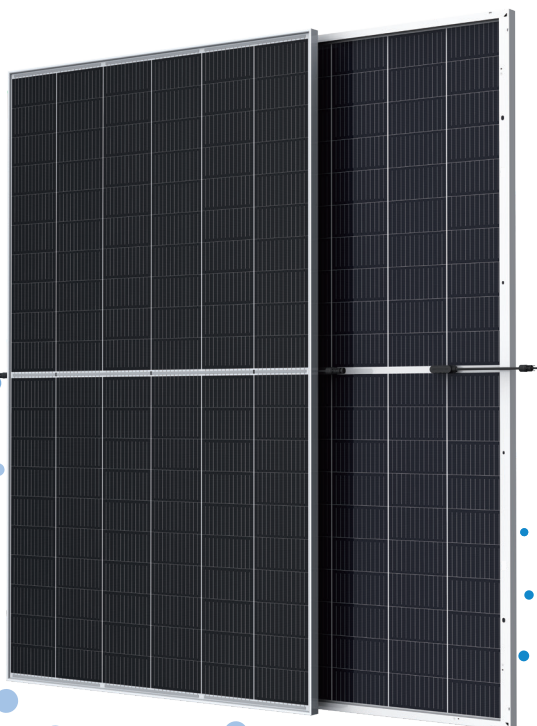

High customer value

- Lower LCOE (levelized cost of energy), reduced BOS (balance of system) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components



High power up to 620W

- Up to 21.9% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability


- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas and fire class rating A or C
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent product bifaciality and low irradiation performance, validated by 3rd party
- Extremely low 1% first year degradation and 0.4% annual power attenuation
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.30%) and operating temperature
- Up to 30% additional power gain from back side depending on albedo

Trina Solar's Vertex Bifacial Dual Glass Performance Warranty

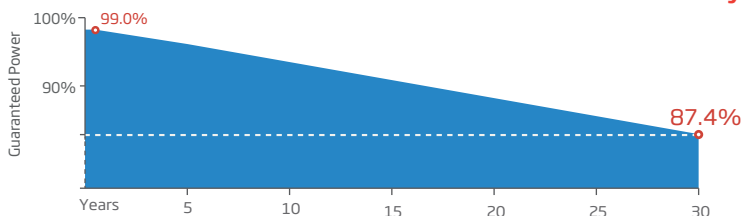

Comprehensive Products and System Certificates



IEC61215/IEC61730/IEC61701/IEC62716

ISO 9001: Quality Management System


ISO 14001: Environmental Management System

ISO14064: Greenhouse Gases Emissions Verification


ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

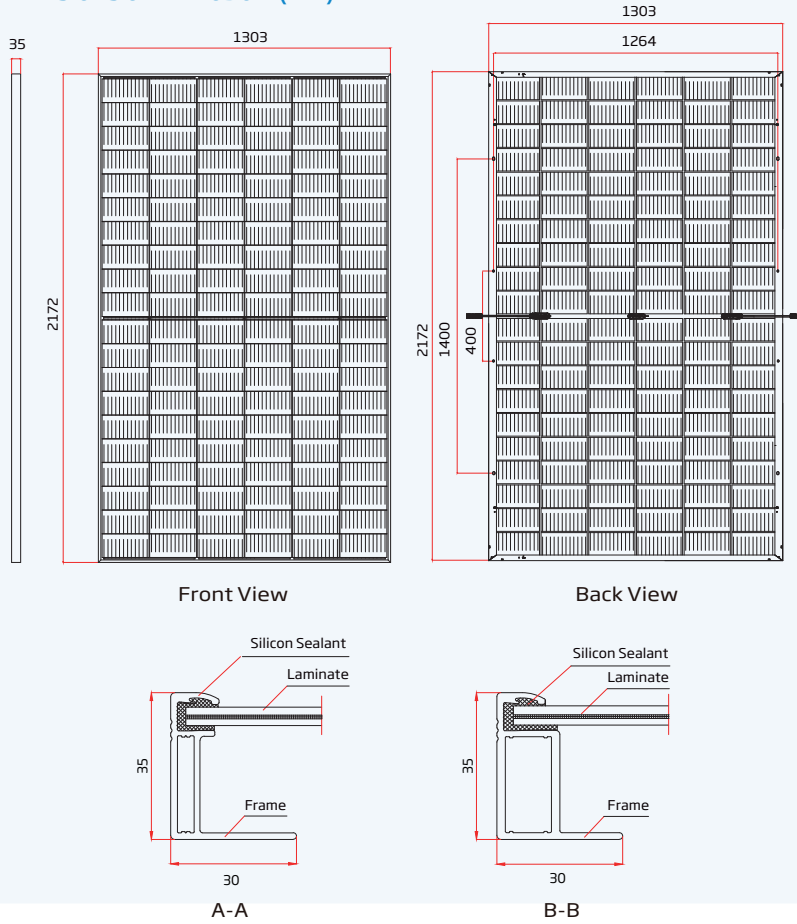

I-V CURVES OF PV MODULE(610W)

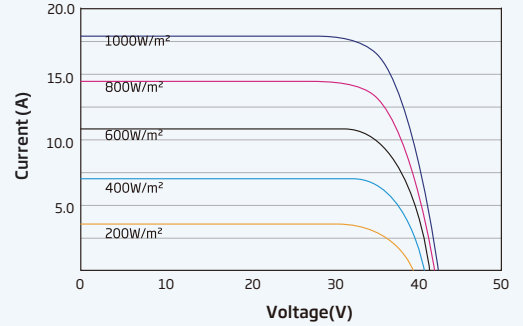

P-V CURVES OF PV MODULE(610 W)

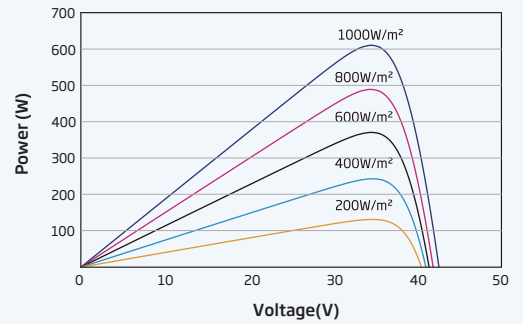

ELECTRICAL DATA (STC) TSM-XXXNEG20C.20 (XXX=600-620)

Peak Power Watts -P _{MAX} (Wp)*	600	605	610	615	620
Binning Tolerance-P _{MAX} (W)			0 ~ +5		
Maximum Power Voltage -V _{MPP} (V)	35.3	35.5	35.7	35.9	36.1
Maximum Power Current -I _{MPP} (A)	17.02	17.06	17.09	17.12	17.16
Open Circuit Voltage -V _{OC} (V)	42.4	42.6	42.8	43.0	43.2
Short Circuit Current -I _{SC} (A)	18.03	18.07	18.10	18.14	18.18
Module Efficiency η _m (%)	21.2	21.4	21.6	21.7	21.9

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power -P _{MAX} (Wp)	648	653	659	664	670
Maximum Power Voltage -V _{MPP} (V)	35.3	35.5	35.7	35.9	36.1
Maximum Power Current -I _{MPP} (A)	18.38	18.42	18.46	18.49	18.53
Open Circuit Voltage -V _{OC} (V)	42.4	42.6	42.8	43.0	43.2
Short Circuit Current -I _{SC} (A)	19.47	19.51	19.55	19.59	19.63
Irradiance ratio (rear/front)			10%		

Product Bifaciality: 80±5%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	458	462	465	468	473
Maximum Power Voltage -V _{MPP} (V)	33.1	33.3	33.5	33.7	33.9
Maximum Power Current -I _{MPP} (A)	13.82	13.85	13.86	13.90	13.92
Open Circuit Voltage -V _{OC} (V)	40.2	40.4	40.6	40.7	40.8
Short Circuit Current -I _{SC} (A)	14.53	14.56	14.59	14.62	14.66

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	2172×1303×35 mm (85.51×51.30×1.57 inches)
Weight	35.3 kg (77.8 lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	35mm(1.57 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: 280/280 mm(11.02/11.02 inches) Length can be customized
Connector	Staubli MC4 EVO2 / TS4

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.30%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	0.05%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	35A

WARRANTY

- 12 year Product Workmanship Warranty
- 30 year Power Warranty
- 1% first year degradation
- 0.4% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

- Modules per box: 25/36 pieces
- Modules per 40' container: 549 pieces